


Glass Door Lock

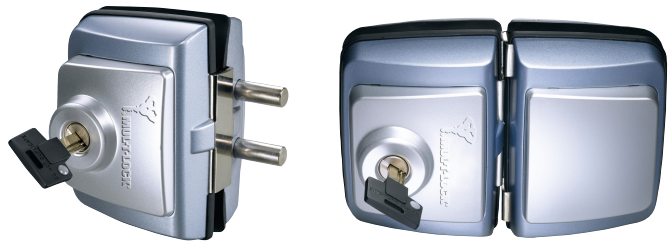

Application

Securing glass doors with 11-13 mm glass thickness. May be adapted to 8-10 mm glass thickness by using extra rubber spacers.

Options

Lock for single glass door (GL100 S)

Lock for double glass door (GL100 D)

Operation

Outside: key locking

Inside: knob with double locking function
- a special anti-manipulation feature that disables the inside knob when locked.

Materials

Body: zinc aluminum alloy

Covers: plastic

Standard finishes

High quality coating

Cylinder mechanism

Mul-T-Lock's unique, high precision pin tumbler system. Pick and drill resistant for High Security needs.

Keys

Reversible nickel silver key with plastic key head and colored insert for identification. Also available in all nickel silver.

Cylinder options

- Classic, Interactive® platforms
- Keyed different, keyed alike
- Master keyed

Note: requires 4 chamber round cylinder.